

INSTYTUT TECHNIKI BUDOWLANEJ
PL 00-611 WARSZAWA
ul. FILTROWA 1
tel.: (48 22) 825-04-71;
(48 22) 825-76-55;
fax: (48 22) 825-52-86;
www.itb.pl



Członek EOTA

European Technical Approval

ETA-05/0225

English language translation - the original version is in Polish language

Nazwa handlowa

Trade name

WKREŃ-MET-ŁIT i WKREŃ-MET-ŁIM

WKREŃ-MET-ŁIT and WKREŃ-MET-ŁIM

Właściciel aprobaty

Holder of approval

P.P.H.U. "WKREŃ-MET-KLIMAS" s.j.

**ul. Wincentego Witosa 170/176
PL 42-223 Kuźnica Kiedrzyńska**

Rodzaj i przeznaczenie wyrobu

*Generic type and use
of construction products*

**Łączniki tworzywowe do mocowania warstwy
izolacyjnej ociepleń ścian zewnętrznych w
podłożu betonowym i w podłożu murowym**

*Nailed-in plastic anchors for fixing of external thermal
insulation composite systems with rendering in concrete
and masonry*

Termin ważności

Valid

od

from

do

to

29. 09. 2006

29. 09. 2011

Zakład produkcyjny

Manufacturing plant

P.P.H.U. "WKREŃ-MET-KLIMAS" s.j.

**ul. Wincentego Witosa 170/176
PL 42-223 Kuźnica Kiedrzyńska**

Niniejsza Europejska

Aprobata Techniczna zawiera

*This European Technical
Approval contains*

15 stron, w tym 6 Załączników

15 pages including 6 Annexes

Niniejsza Europejska

Aprobata Techniczna zastępuje

*This European Technical
Approval replaces*

ETA-05/0225 ważną od 09.12.2005 do 09.12.2010

ETA-05/0225 with validity from 09.12.2005 to 09.12.2010



Europejska Organizacja ds. Aprobatach Technicznych

European Organisation for Technical Approvals

I LEGAL BASES AND GENERAL CONDITIONS

1. This European Technical Approval is issued by Instytut Techniki Budowlanej in accordance with:
 - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products¹, amended by the Council Directive 93/68/EEC of 22 July 1993²;
 - ustawa z dnia 16 kwietnia 2004 r. o wyrobach budowlanych (law on construction products from 16th April 2004)³;
 - rozporządzenie Ministra Infrastruktury z dnia 14 października 2004 r. w sprawie europejskich aprobat technicznych oraz polskich jednostek organizacyjnych upoważnionych do ich wydawania (regulation of Ministry of Infrastructure of 14th October 2004 on the European Technical Approvals and Polish bodies entitled to issue them)⁴;
 - Common Procedural Rules for Requesting, Preparing and the Granting of European Technical Approvals set out in the Annex of Commission Decision 94/23/EC⁵;
 - Guideline for European Technical Approval of „Plastic anchors for fixing of external thermal insulation composite systems with rendering”, ETAG 014, edition January 2002.
2. Instytut Techniki Budowlanej is authorized to check whether the provisions of this European Technical Approval are met. Checking may take place in the manufacturing plant. Nevertheless, the responsibility for the conformity of the products to the European Technical Approval and for their fitness for the intended use remains with the holder of the European Technical Approval.
3. This European Technical Approval is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1 of this European Technical Approval.
4. This European Technical Approval may be withdrawn by Instytut Techniki Budowlanej, in particular after information by the Commission on the basis of Article 5 (1) of Council Directive 89/106/EEC.
5. Reproduction of this European Technical Approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of Instytut Techniki Budowlanej. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European Technical Approval.
6. The European Technical Approval is issued by the approval body in its official language. This version corresponds to the version circulated within EOTA. Translations into other languages have to be designated as such.

¹ Official Journal of the European Communities № L 40, 11.02.1989, p. 12

² Official Journal of the European Communities № L 220, 30.08.1993, p. 1

³ Official Journal of Polish Republic № 92/2004, pos. 881

⁴ Official Journal of Polish Republic № 237/2004, pos. 2375

⁵ Official Journal of the European Communities № L 17, 20.01.1994, p. 34

II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

1 Definition of product and intended use

1.1 Definition of product

The WKREȚ-MET-ŁIT nailed-in plastic anchor consists of a ŁI anchor sleeve with a plate made of polypropylene and an accompanying specific TŁI nail as an expansion pin made of the glass fibre reinforced polyamide.

The WKREȚ-MET-ŁIM nailed-in plastic anchor consists of a ŁI anchor sleeve with a plate made of polypropylene and an accompanying specific TG nail as an expansion pin made of galvanised steel.

The WKREȚ-MET-ŁIT and WKREȚ-MET-ŁIM anchors may in addition be combined with the plate TD-140 shown in Annex 6.

The installed anchor is shown in Annex 1.

1.2 Intended use

The anchors are intended to be used for anchorages for which requirements for safety in use in the sense of the Essential Requirement 4 of Council Directive 89/106/EEC shall be fulfilled and failure of anchorages made with these products would cause low risk to human life. The anchors are to be used only as multiple fixing for the anchorage of bonded external thermal insulation composite systems (ETICS) according to ETAG 004 in concrete and masonry. The substrate (base material) shall consist of reinforced or plain normal weight concrete of strength class C 12/15 at minimum and C 50/60 at maximum according to EN 206-1 or of solid masonry walls according to EN 771-1 (Table 6, Annex 5).

The provisions made in this European Technical Approval are based on an assumed working life of the anchor of 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

2 Characteristics of product and methods of verification

2.1 Characteristics of product

The anchors correspond to the drawings and information given in Annexes 1, 2 and 3. The characteristic material values, dimensions and tolerances of the anchor not indicated in these Annexes shall correspond to the respective values laid down in the technical documentation⁶ of this European Technical Approval.

⁶ The technical documentation of this European Technical Approval is deposited at Instytut Techniki Budowlanej and, as far as relevant for the tasks of the approved body involved in the attestation of conformity procedure, may be handed over only to the approved body involved.

The characteristic values for the design of the anchorages are given in Annexes 4 and 5.

Each anchor is to be marked with identification mark of the producer, the sleeve type, the diameter and the length of the anchor. The minimum anchorage depth shall be marked.

The anchor shall only be packaged and supplied as a complete unit. Each package is to be marked with the type of the anchor, e.g. ŁIT or ŁIM.

2.2 Methods of verification

The assessment of the fitness of the anchors for the intended use in relation to the requirements for safety in use in the sense of the Essential Requirement 4 has been made in compliance with the Guideline for European Technical Approval of „Plastic anchors for fixing of external thermal insulation composite systems with rendering”, ETAG 014, based on the use categories A and B.

3 Evaluation of Conformity of the Product and CE-marking

3.1 Attestation of Conformity System

The system of attestation of conformity 2 (ii) (allocated to system 2+) according to Council Directive 89/106/EEC Annex III provides:

(a) Tasks of the manufacturer:

- (1) initial type-testing of the product,
- (2) factory production control,
- (3) testing of samples taken at the factory by the manufacturer in accordance with a prescribed test plan.

(b) Tasks of the approved body:

- (4) certification of factory production control on the basis of
 - initial inspection of factory and of factory production control,
 - continuous surveillance, assessment and approval of factory production control.

3.2 Responsibilities

3.2.1 Tasks of the manufacturer; factory production control

The manufacturer has a factory production control system in the plant and exercises permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer are documented in a systematic manner in the form of written policies and procedures. The factory production control system ensures that the product is in conformity with the European Technical Approval.

The manufacturer may only use raw materials supplied with the relevant inspection documents as laid down in the control plan⁷. The incoming raw materials shall be

⁷ The control plan has been deposited at Instytut Techniki Budowlanej and may be handed over only to the approved body involved in the conformity attestation procedure.

subjected to controls and tests by the manufacturer before acceptance. Check of incoming materials shall include control of inspection documents presented by the manufacturer of the raw materials (comparison with nominal values) by verifying the dimensions and determine the material properties.

The manufactured components of the anchors shall be subjected to the following tests:

- plastic sleeve ŁI:
 - shape,
 - dimensions (diameter, lengths),
 - markings,
 - properties of polypropylene granules (density, melt mass-flow rate (MFR), DSC-curve),
 - documentation of adjusting data of injection moulding machine,
- plastic expansion pin TŁI and plastic plate TD-140:
 - shape,
 - dimensions (diameter, lengths),
 - properties of polyamide granules (density, melt mass-flow rate (MFR), DSC-curve),
 - documentation of adjusting data of injection moulding machine,
- metal expansion pin TG:
 - shape,
 - dimensions (diameter, lengths),
 - properties of steel (yield limit, tensile strength),
 - thickness of the zinc coating,
- visual control of correct assemblage and of completeness of the anchors.

The frequency of controls and tests conducted during production and on the assembled anchors is laid down in the control plan taking account of the automated manufacturing process of the anchors.

The results of factory production control are recorded and evaluated. The records include at least the following information:

- designation of the product, basic materials and components,
- type of control or testing,
- date of manufacture of the product and date of testing of the product or basic materials or components,
- result of control and testing and, if appropriate, comparison with requirements,
- signature of person responsible for factory production control.

The records shall be presented to the approved body involved in continuous surveillance. On request they shall be presented to Instytut Techniki Budowlanej. Details of extent, nature and frequency of testing and controls to be performed within the factory production control shall correspond to the control plan which is part of the technical documentation of this European Technical Approval.

3.2.2 Tasks of the approved body

3.2.2.1 Initial inspection of factory and of factory production control

The approved body shall ascertain that, in accordance with the control plan, the factory, in particular the staff and equipment, and the factory production control are suitable to ensure a continuous and orderly manufacturing of the anchor with the specifications mentioned in 2.1 as well as in the Annexes to the European Technical Approval.

3.2.2.2 Continuous surveillance

Continuous surveillance and assessment of factory production control have to be performed according to the control plan.

The approved body shall visit the factory at least once a year for surveillance. It has to be verified that the system of factory production control and the specified automated manufacturing process are maintained taking account of the control plan.

The results of continuous surveillance shall be made available on demand by the approved body to Instytut Techniki Budowlanej.

3.3 CE-marking

The CE-marking shall be affixed on each packaging of the anchor. The symbol „CE” shall be accompanied by the following information:

- identification number of the approved body,
- name or identifying mark of the manufacturer and manufacturing plant,
- the last two digits of the year in which the CE-marking was affixed,
- number of the European Technical Approval,
- use categories A and B, according to ETAG 014.

4 Assumptions under which the fitness of the product for the intended use was favorably assessed

4.1 Manufacturing

The anchors are manufactured in accordance with the provisions of the European Technical Approval using the automated manufacturing process as identified in the inspection of the plant by Instytut Techniki Budowlanej.

4.2 Installation

4.2.1 Design of anchorages

4.2.1.1 General

The ETA only applies to the manufacture and use of the anchors. Verification of stability of the external thermal insulation composite system including application of loads on the anchor and on the additional plate is not subject of this European Technical Approval.

Fitness for the intended use of the anchors is given under the following conditions:

- the design of anchorages is carried out in compliance with ETAG 014 Guideline for European Technical Approval of “Plastic anchors for fixing of external thermal insulation composite systems with rendering” under the responsibility of an engineer experienced in anchorages,
- verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials, the thickness of insulation and the dimensions of the anchorage members as well as of the relevant tolerances.

Proof of direct local application of load on the base material has been delivered.

4.2.1.2 Resistance

The characteristic values of the tension resistance of the anchors are given in Table 6, Annex 5. If there is a difference to the given characteristic values of the base material or there is a similar base material of category B supposed to be used, the job-site tests according to 4.2.3 shall be carried out and the characteristic tension resistance shall be determined.

4.2.1.3 Characteristic values, spacing and dimensions of anchorage member

The minimum spacing and dimensions of anchorage member according to Annex 4 shall be observed.

4.2.1.4 Displacement behavior

When loaded to the design value of resistance in normal weight concrete and in masonry made of clay bricks a displacement of approximately 0,1 mm in load direction is expected.

4.2.2 Installation of anchor

The fitness for use of the anchor can only be assumed if the following conditions of installation are met:

- anchor installation carried out by appropriately qualified personnel under the supervision of the person responsible for technical matters on site,
- use of the anchor only as supplied by the manufacturer without exchanging any component of the anchor,
- anchor installation in accordance with the manufacturer's specifications and drawings using the tools indicated in this European Technical Approval,
- checks before placing the anchor, to ensure that the characteristic values of the base material in which the anchor is to be placed, is identical with the values, which the characteristic loads apply for,
- observation of the drill method (drill holes in concrete and in masonry made of clay bricks may be drilled using the rotary - impact driller),
- placing drill holes without damaging the reinforcement,
- temperature during installation of the anchor $\geq 0^{\circ}\text{C}$.

4.2.3 Job site tests

The characteristic tension resistance of the anchor may be determined by means of job site pull-out tests carried out on the material actually used, if a characteristic resistance of the base material does not exist (for example masonry made of other solid masonry units).

The characteristic resistance of the anchor shall be determined by carrying out at least 15 centric tension load pull-out tests on site. These tests are also possible under the same conditions in a laboratory.

Execution and evaluation of the tests as well as the issue of the test report and the determination of the characteristic resistance should be under the responsibility of approved testing laboratory or the supervision of the person responsible for the execution of the works on site.

Number and position of the anchors to be tested shall be adapted to the relevant special conditions of the site and, for example, to be increased in the case of hidden and larger areas, such that reliable information about the characteristic resistance of the anchor in the base material in question can be derived. The tests shall take into account the most unfavorable conditions of the practical execution.

4.2.3.1 Assembly

The anchor to be tested shall be installed (e.g. preparation of drill hole drilling tool to be used, drill bit) and the spacing and the edge distances shall be in the same way as planned for the fixing of the external thermal insulation composite system.

Depending on the drilling tool and according to ISO 5468, hard metal hammer-drill bits or hard metal percussion drill bits, respectively, shall be used. The cutting diameter shall be at the upper tolerance limit.

4.2.3.2 Execution of test

The test rig used for the pull-out tests shall provide a continuous slow increase of the load, controlled by a calibrated load cell. The load shall be applied perpendicular to the surface of the base material and shall be transmitted to the anchor via a hinge. The reaction forces shall be transmitted into the base material at a distance of at least 15 cm from the anchor. The load shall be increased continuously in a way, that the ultimate load is reached after about 1 minute. The load is measured when the ultimate load (N_1) is achieved.

4.2.3.3 Test report

The test report shall include all information necessary to assess the resistance of the tested anchor. It shall be included in the construction work dossier.

The minimum data required are:

- construction site, owner of building, date and location of the tests, air temperature, ETICS to be fixed,
- masonry (type of brick, strength class, all dimensions of bricks, mortar group), visual assessment of masonry (flush joints, joint clearance regularity),
- plastic sleeve and plastic or metal expansion pin, value of the cutting diameter of hard metal hammer-drill bits, measured before and after drilling,
- test rig, results of tests including the indication of value N_1 ,
- name and signature of person having performed or supervised the test.

4.2.3.4 Evaluation of test results

The characteristic resistance N_{RK1} is derived from the measured values N_1 as follows

$$N_{RK1} = 0,6 \cdot N_1 \leq 1,5 \text{ kN},$$

N_1 = the mean value of the five smallest measured values at the ultimate load.

4.2.4 Responsibility of the manufacturer

It is in the responsibility of the manufacturer to ensure that the information on the specific conditions according to 1 and 2 including Annexes, referred to in 4.2.1, 4.2.2 and 5 is given to those who are concerned. This information may be made by reproduction of the respective parts of the European Technical Approval. In addition, all installation data shall be shown clearly on the packaging and/or on an enclosed instruction sheet, preferably using illustrations.

The minimum data required are:

- base material for the intended use,
- drill bit diameter,
- maximum thickness of the ETICS,
- minimum effective anchorage depth,
- minimum hole depth,
- information on the installation procedure,
- identification of the manufacturing batch.

All data shall be presented in a clear and explicit form.

5 Recommendations for the manufacturer

5.1 Recommendations on packaging, transport and storage


The anchor shall only be packaged and supplied as a complete unit.

If there is no conditioning (moisturisation) after the production of the plastic expansion pin, the pin may only be delivered after 5 weeks.

The anchor shall be stored under normal climatic conditions. Before installation, it shall not be extremely dried nor frozen.

On behalf of Instytut Techniki Budowlanej

Assoc. Prof. Stanisław M. Wierzbicki
Director of ITB

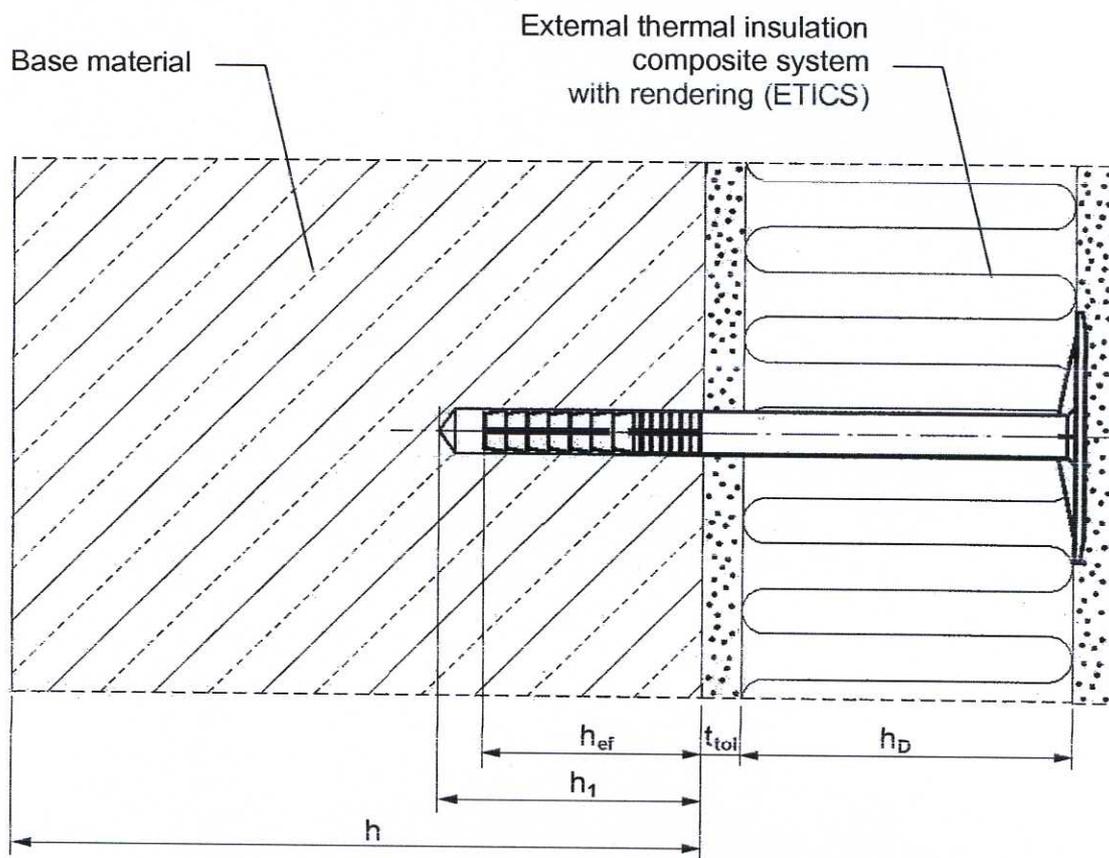

Intended Use

Fixing of external thermal insulation composite systems in concrete and masonry

Legend

- h_{ef} = effective anchorage depth
- h_1 = depth of drill hole in base material
- h = thickness of base material
- h_D = thickness of insulation material
- t_{tol} = thickness of equalizing and/or non-load-bearing layer

<p>WKREŃ-MET-ŁIT and WKREŃ-MET-ŁIM</p>	<p>Annex 1 of European Technical Approval ETA-05/0225</p>
<p>Intended Use</p>	



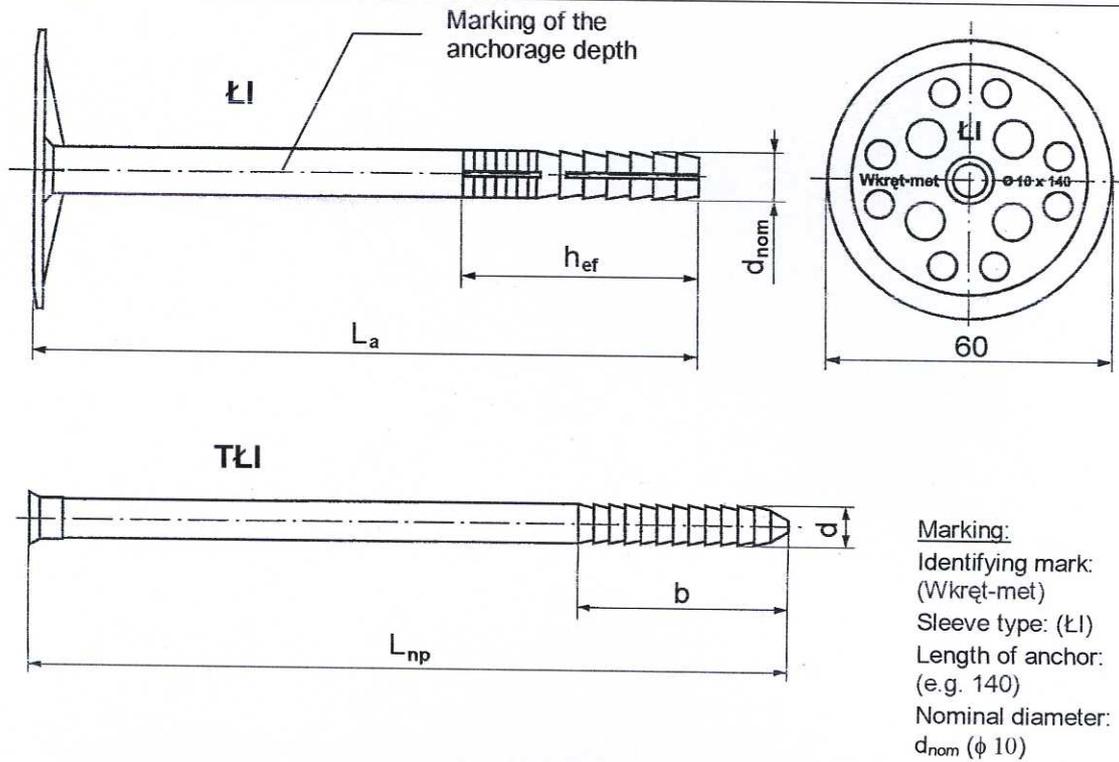


Table 1: WKRET-MET-ŁIT anchor types and dimensions [mm]

Anchor type	Anchor sleeve			Expansion pin		
	d _{nom}	h _{ef}	L _a	d	b	L _{np}
ŁIT 10 × 70	10	45	70	5,5	33	70
ŁIT 10 × 90	10	45	90	5,5	33	90
ŁIT 10 × 100	10	45	100	5,5	33	100
ŁIT 10 × 110	10	45	110	5,5	33	110
ŁIT 10 × 120	10	45	120	5,5	33	120
ŁIT 10 × 140	10	45	140	5,5	33	140
ŁIT 10 × 160	10	45	160	5,5	33	160
ŁIT 10 × 180	10	45	180	5,5	33	180
ŁIT 10 × 200	10	45	200	5,5	33	200

Determination of maximum thickness of insulation material $h_D = L_a - t_{tot} - h_{ef}$

WKRET-MET-ŁIT and WKRET-MET-ŁIM	Annex 2 of European Technical Approval ETA-05/0225
WKRET-MET-ŁIT Types and dimensions	

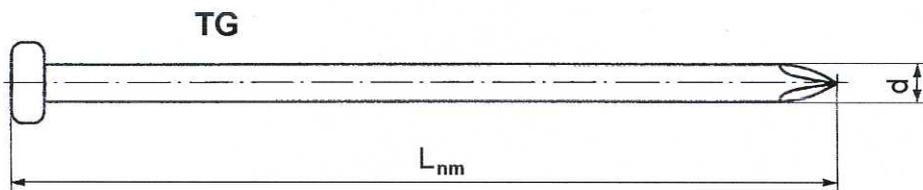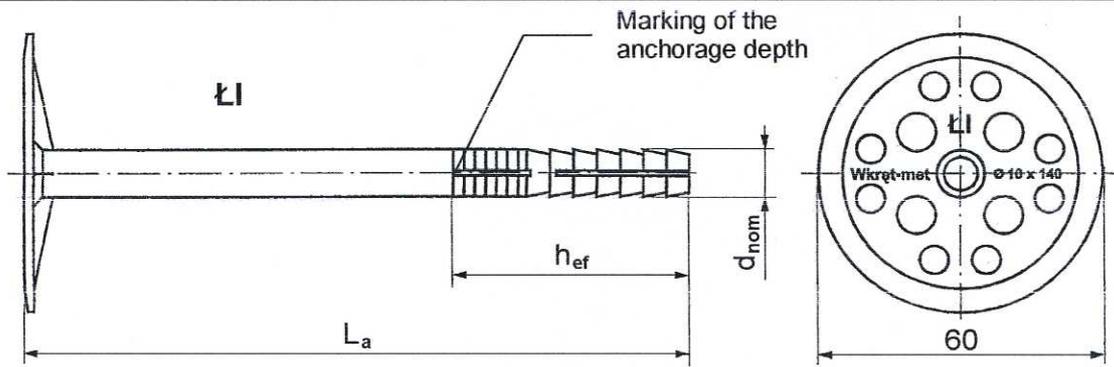

Marking:
 Identifying mark:
 (Wkret-met)
 Sleeve type: (ŁI)
 Length of anchor:
 (e.g. 140)
 Nominal diameter:
 d_{nom} (ϕ 10)

Table 2: WKREȚ-MET-ŁIM anchor types and dimensions [mm]

Anchor type	Anchor sleeve			Expansion pin	
	d_{nom}	h_{ef}	L_a	d	L_{nm}
ŁIM 10 × 70	10	45	70	5,5	75
ŁIM 10 × 90	10	45	90	5,5	95
ŁIM 10 × 100	10	45	100	5,5	105
ŁIM 10 × 110	10	45	110	5,5	115
ŁIM 10 × 120	10	45	120	5,5	125
ŁIM 10 × 140	10	45	140	5,5	145
ŁIM 10 × 160	10	45	160	5,5	166
ŁIM 10 × 180	10	45	180	5,5	185
ŁIM 10 × 200	10	45	200	5,5	205
ŁIM 10 × 220	10	45	220	5,5	225
ŁIM 10 × 260	10	45	260	5,5	265

Determination of maximum thickness of insulation material $h_D = L_a - t_{tol} - h_{ef}$

WKREȚ-MET-ŁIT and WKREȚ-MET-ŁIM	Annex 3 of European Technical Approval ETA-05/0225
WKREȚ-MET-ŁIM Types and dimensions	

Table 3: Materials

Designation	Material
Anchor sleeve ŁI	Polypropylene, white
Expansion pin TŁI	Glass fibre reinforced polyamide PA6, black or grey
Expansion pin TG	Carbon steel ($f_{y,k} = 190$ MPa, $f_{u,k} = 310$ MPa) galvanised ≥ 15 μm according to EN ISO 4042, yellow chromated


Table 4: Installation characteristics

Anchor type	ŁIT and ŁIM
Nominal diameter of drill bit d_o [mm]	10
Cutting diameter of drill bit d_{cut} [mm]	$\leq 10,45$
Depth of drill hole h_1 [mm]	≥ 60
Effective anchorage depth h_{ef} [mm]	≥ 45

Table 5: Minimum thickness of base material, anchor spacing and edge distance

Anchor type	ŁIT and ŁIM
Minimum thickness of base material h [mm]	100
Minimum spacing s_{min} [mm]	100
Minimum edge distance c_{min} [mm]	100

Diagram of spacing

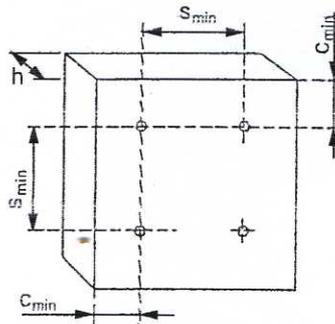

**WKREŃ-MET-ŁIT
and WKREŃ-MET-ŁIM**

Materials, installation characteristics,
 minimum thickness of base material,
 edge distance and spacing

Annex 4
 of European
 Technical Approval
 ETA-05/0225

Table 6: Characteristic resistance to tension loads N_{Rk} , kN in concrete and masonry for single anchor

Base material	Bulk density class [kg/dm ³]	Min. compressive strength [N/mm ²]	Referring standard	N_{Rk} [kN]	
				ŁIT	ŁIM
Concrete C12/15			EN 206-1	0,30	0,30
Concrete C16/20 + C50/60			EN 206-1	0,40	0,50
Clay bricks	1,6	15,1	EN 771-1	0,40	0,40
Partial safety factor for anchor resistance, γ_M ¹⁾	2,0				
¹⁾ Valid in absence of national regulations					

**WKREŃ-MET-ŁIT
and WKREŃ-MET-ŁIM**

Characteristic resistance

Annex 5
of European
Technical Approval
ETA-05/0225

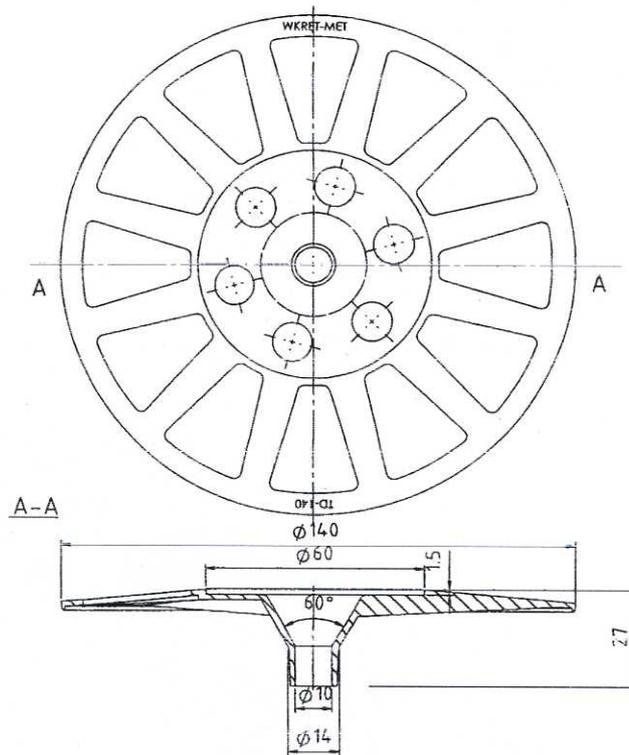


Table 7: Additional plate TD-140

Plate type	Outer diameter [mm]	Material
TD-140	140	Polyamide PA6, grey

**WKREȚ-MET-ȚIT
 and WKREȚ-MET-ȚIM**

Additional plate TD-140 in combination with anchor sleeve ȚI

Annex 6
 of European
 Technical Approval
 ETA-05/0225